


! The maximum screen size and/or weight limit for this mounting bracket is 65" (diagonal) or 40kg / 88lbs. Recommended minimum screen size is 32". This guide assumes the mounting surface is flat, at least 1" thick, structurally sound and can support the bracket and maximum TV weight.


Table Preparation

- 1 If the mounting surface is not pre-drilled, select a location where the bottom plate is accessible and will not interfere with frames, electrical or other obstructions. Using a 3/8" or 10mm drill bit, drill two holes 4.75" or 120mm apart at least 2.5" from the edge.

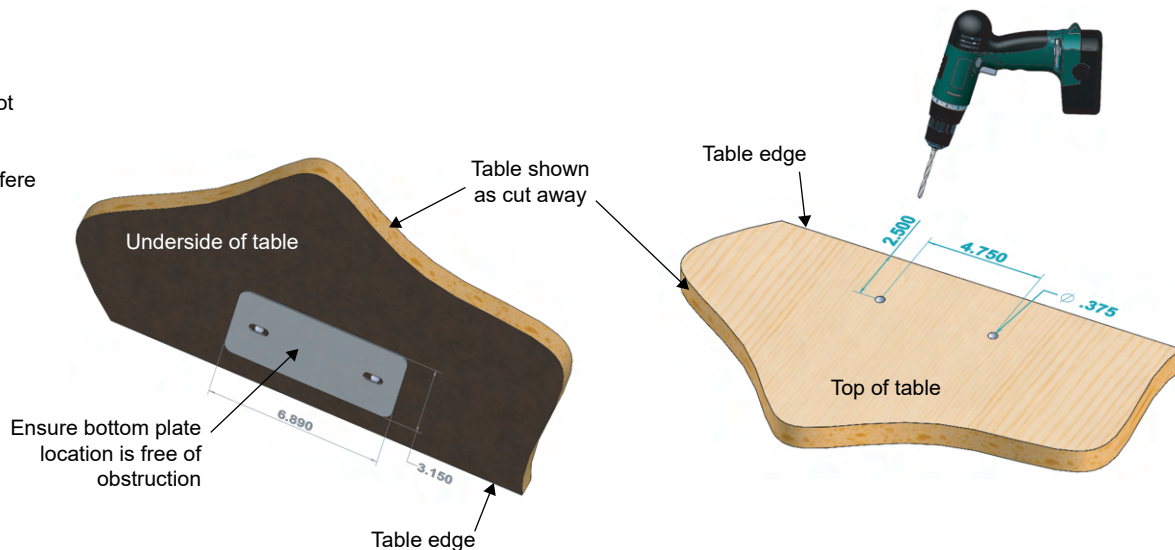


Install Columns

- 2 Install both columns into the table making sure the plastic gaskets are installed between the metal column and the table top. Orient the holes in the columns to be perpendicular to the back edge of the table.

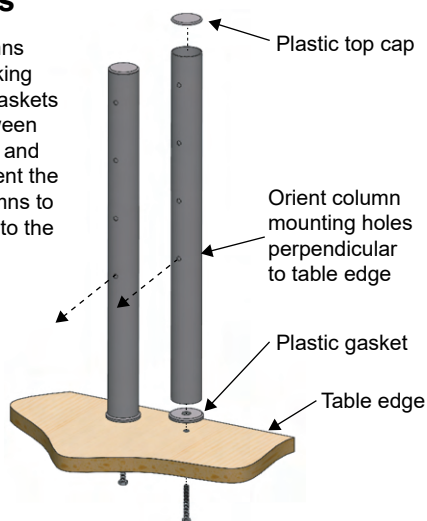


Install Upper TV Mount

- 3 Mount upper TV plate bracket to columns in one of the four positions available according to TV size and viewer height requirements.

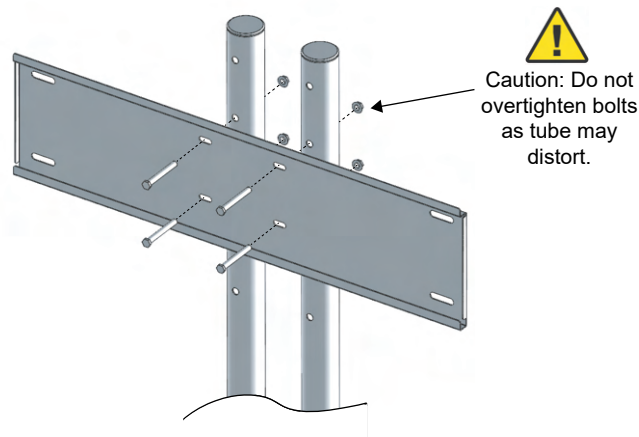

Mount TV Brackets

- 4 Center hanging brackets on rear of TV and attach using VESA mounting holes. Hooks on bracket must face towards bottom of TV.

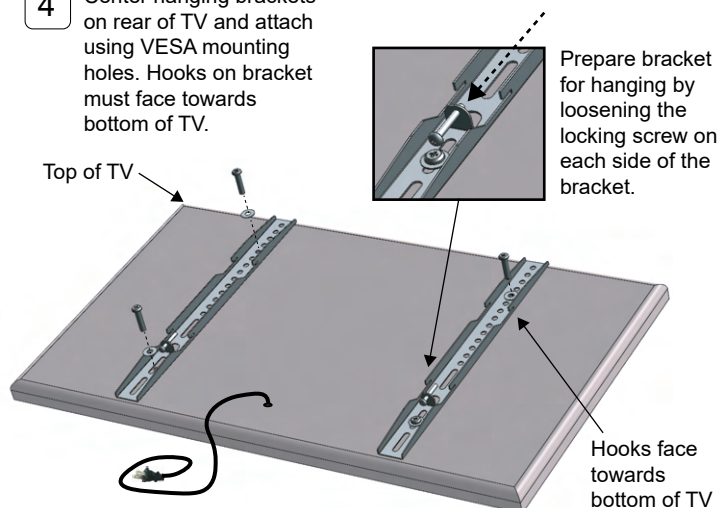

Final Assembly

- 5 Ensure that mounting brackets in the previous step are secure. Lift TV onto upper TV plate bracket and slide down to engage hanging brackets at top and bottom. Finish by screwing in the locking screws until they seat against the bottom of the upper TV plate bracket.

! Ensure locking screw is fully extended. Failure may result in damage or injury.

